

FIBREGLASS FILAMENT-WOUND WATER WELL CASING


Specifications:		24" Diameter	30" Diameter Standard	30" Diameter Heavy
Unit Length	Feet / mm	20' / 6100mm	20' / 6100 mm	20' / 6100 mm
Thickness	Inches / mm	0.25" / 6.4 mm	0.20" / 5.1 mm	0.28" / 7.1 mm
Weight	Lbs. / Length / Kg. / Length	290 lbs. / 132 kgs.	305 lbs. / 139 kgs.	340 lbs. / 155 kgs.
Capacities	Imp. Gal / Ft. / Litre / m	19.6 gals. / 292 ltrs.	30.6 gals. / 456 ltrs.	30.6 gals. / 456 ltrs.

Ribs		24" Diameter	30" Diameter Standard	30" Diameter Heavy
Width	inches / mm	3" / 76 mm	3" / 76 mm	3" / 76 mm
Thickness	Inches / mm	0.5" / 13 mm	0.5" / 13 mm	0.5" / 13 mm
Distance between	Inches / mm	30" / 762 mm	30" / 762 mm	30" / 762 mm

Well Cap / Bottom		24"	30"
Thickness	inches / mm	0.30" / 7.6 mm	0.30" / 7.6 mm
Weight	Lbs. / Length / Kg. / Length	10 lbs. / 4.5 kgs.	15 lbs. / 6.8 kgs.

Burial Depth	80'	40'	100'
Feet / metres	24.4 m	12.2 m	30.5 m

Pieces / Truckload	32	18	18

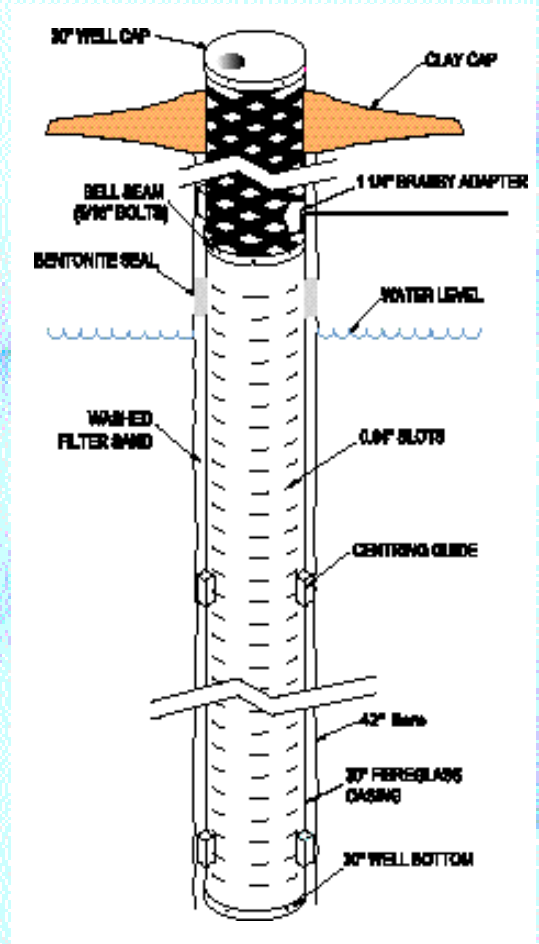

Structural Glass Ltd

20 Burnett Avenue
 Winnipeg, Manitoba
 R2G 1C1
 Tel: (204) 668-9320
 Fax: (204) 663-9115
 e-mail: sgl@mts.net